

INSUL^{TEC} TEC



500 Series by OKNA Windows



OKNA

DOUBLE HUNG



The secret behind this window's performance is its exceptionally low air infiltration ratings which can lower the energy consumption of a typical home by 25–40%. This unique feature, combined with our HeatSeal® Glass System or SunSeal® Glass System, offers outstanding thermal performance and exceeds the most rigorous Energy Star Requirements.



Standard slim profile sash lock with tamper-resistant cam ensures a much smoother turn and increases the life cycle over traditional locks. Push button spring-loaded vent latches allow both window sashes to remain partially open for ventilation. Decorative tilt latch for easy tilting. WOCD now available as an upgrade.

Please see WOCD Latches (pg 9) for more information.



Full 3¼" Depth uPVC Fusion Welded Frame and Sashes
Features beveled colonial exterior curves that are not only beautiful, but also allows for maximum welded surfaces, resulting in outstanding strength and years of long-lasting performance.



Sill Dam Wall
Mortised into the jamb, the sill dam wall adds strength and lowers the possibility of leaks that may occur at corner seals.



Fully Integrated Lift Rail
Gives this window a nice, contemporary look and ease of operation.

SLIDER



Other Features

- **Full 3¼" Depth uPVC Fusion Welded Frame and Sashes**
Features beveled colonial exterior features curves that are not only beautiful, but also allows for maximum welded surfaces, resulting in exceptional strength and years of long-lasting performance.
- **HeatSeal® Glass System**
Offers thermal efficiency for fuel cost savings in any season.
- **Heavy Gauge Fully Extruded Handles on Both Sashes**
- **Standard Slim Profile Sash Lock with Tamper-Resistant Cam**
Ensures a much smoother turn and increases the life cycle over traditional locks.
- **Standard Smooth Glide System**
Contains high quality brass wheels to allow the slider to smoothly glide across its tracks.
- **Full Integral Interlock with Double Weatherstripping**
- **0.09 cfm/ft2 Air Infiltration for Sliding Window**
222% better than Industry Average. (See Air Infiltration Chart for average)
- **Available in Double and Triple Panel Configurations**
- **Available in Replacement and New Construction Applications**



Fiberglass Mesh Half Screens
Standard on all windows. All painted exterior windows come standard with a full screen.




Push Button, Spring-Loaded Vent Latches
Allows both window sashes to remain partially open for ventilation.

Smooth Glide System

Standard


High quality brass wheels allow the slider to smoothly glide across its track.

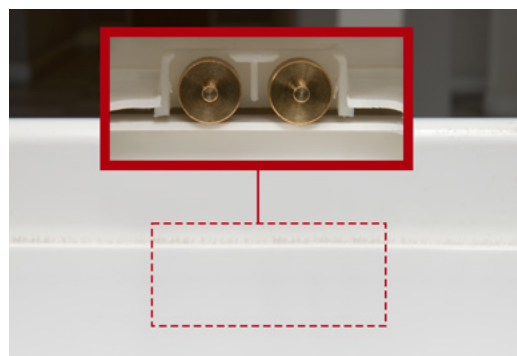

EZ Glide System

Optional

This system contains an anodized aluminum track and precision ball bearing wheels for smoother glide and operation especially with oversized and triple pane units.

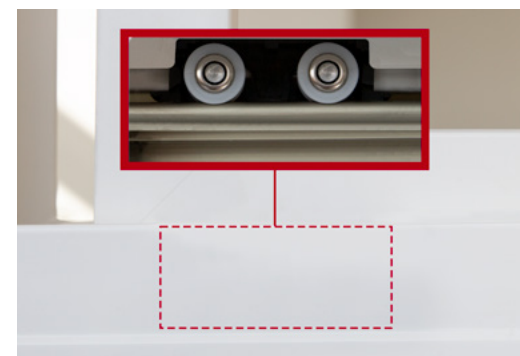

Options

We know that you want to make your visions come to life while enhancing your home's curb appeal. That's why we offer a myriad of special order color options in addition to the standard Euro-White. Our paints are environmentally safe and durable, giving you many years of enjoyment.

Hardware and Interior Colors

All colors options other than Standard Euro-White are available at an additional charge.



Standard Euro-White Finish with Standard Euro-White Lock



Optional Almond Finish with Optional Almond Lock

Exterior Colors

OKNA Windows offers many color selections in addition to the standard Euro-White to give your home a distinct look and enhance its curb appeal. You can special order custom exterior colors from a virtually unlimited selection of paints. Our paints are environmentally safe and durable, giving your exterior a vibrant and long-lasting finish.



Almond Optional
Sandstone Optional*
Terra Brown Optional*
Cocoa Optional
Basic Brown Optional*
Bronze Optional
Nicol's Black Optional*
Custom Colors Optional

* Surcharge applied for painted screens.

All colors except Euro-White are available at an additional charge.

Printed colors may not exactly match the actual product. Please visit a local dealer to view actual color samples.

Optional WOCD Latches

(Window Opening Control Device)

As of 2018, more states are adapting this feature into their window manufacturing and installation regulations. When activated, the device will allow the window to be opened no more than four inches. If you would like to open the window fully, you can deactivate the device and when you close the window the device automatically reactivates.

Available in White and Almond.




Screens


ThruVision Plus[®] is our fiberglass improved visibility screen. This product does for windows and doors what high-definition technology has done for television viewing; it improves the view by making it sharper and more vivid.

OKNA Windows offers a standard half screen with a heavy duty handle for easy operation. We also offer an optional locking half screen, which has the benefit of always keeping your screen locked in place. A full screen is also available.

All exterior painted windows must have full screens.



Industry Average Screen



ThruVision PLUS[®]
Standard on all OKNA Products



Standard Half Screen
Standard on all OKNA Products



Locking Half Screen
Optional

Specialty Glass

OKNA Windows offers textured glass in a variety of distinctive choices that add visual interest to any design while offering variability in light control. Shown here is our Obscure glass. Other available glass options are tempered, laminated, and custom configuration. With a range of options at your fingertips, you can find a standard glass texture for virtually every application and aesthetic, from traditional to modern.




Obscure

Grids

Grids Between Glass (GBG) consist of aluminum bars sealed in the insulating airspace between the two panes of glass. Because the interior and exterior glass surfaces are not affected, cleaning your windows is a much easier task. GBG grids on two-tone windows are available with matching interior and exterior colors*.

*Nicol's Black available on Euro-White two-tone 11/16 inch Contour Grid ONLY.
 Custom Colors are not available on GBG.

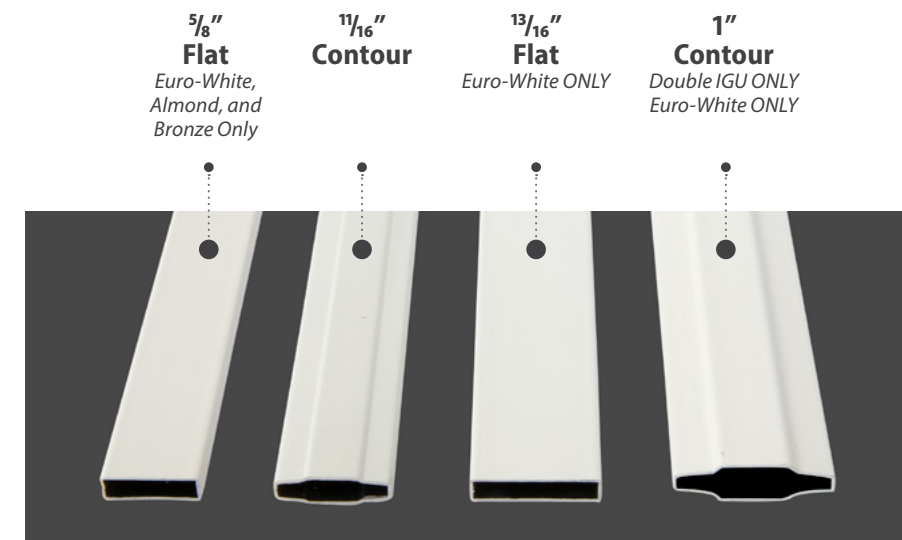

Balance System

PowerLift (Block-and-Tackle) balance system used in our windows can achieve life cycles as high as 28,000 cycles. Constant Force commonly used by other window manufacturers only achieves 5,000 cycles.*

Constant Force




* Based on test performed by BSI Hardware-Amesbury Group

The Glass Unit

The glass unit is one of the most important elements of your new window. It is about 90% of the whole window. Your decision will dramatically affect your living comfort and expenses for many years.

High Performance Reflective Glass Coatings

HeatSeal® heat reflective coatings are microscopically thin layers of metal & metal oxide that act like a filter – some energy is transmitted, some energy is reflected.

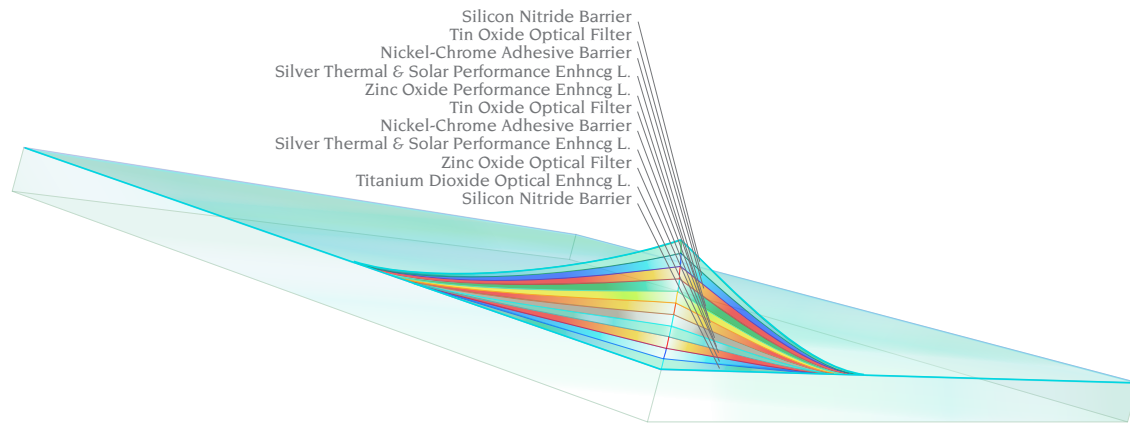



High Performance HeatSeal® Spacer

The glass panes are separated by a “spacer”. A spacer is the piece that is located between panels of glass in an insulating glass system. Its main function is to seal the gas space between them. Majority of windows, unlike OKNA Windows, are made with metal spacers. The main disadvantage to metal spacers is energy loss and condensation.

Our HeatSeal® Spacer and sealant system is made with six individual non-metallic components. Produced in a controlled factory setting and comes ready to use, out of the box: no assembly and no adding other components. Used in OKNA’s state-of-the-art robotic assembly line, our spacer is applied with a one-step process where units are sealed using heat and compression. Our HeatSeal® Spacer guarantees your home the warmest glass and least condensation possible.

HeatSeal® Spacer

guarantees your home the warmest glass and least condensation possible. As much as 15.3° F warmer sill temperature at sightline.

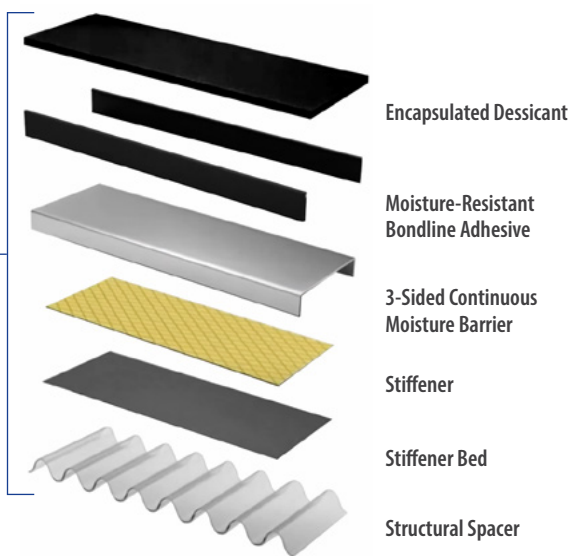

Examples of Condensation:
A good quality spacer can significantly reduce condensation in comfortable humidity levels. Water and ice forming can lead to mold growth.



Metal Spacer




Warm Edge Spacer

Temperature Outside - 0° F • Temperature Inside - 70° F


Glass Options

When deciding on what glass package to choose, keep your environment in mind. Do you live in an area that it is mainly sunny and warm or one that has cold and warm weather? No matter what the answer is, we have a glass coating available to fit your needs. Our HeatSeal® glass is perfect for areas that tend to have fluctuating temperatures in the seasons. It helps to keep the warm air in during the winter and protect your home from the heat of the sun in the summer. For those who deal with warmer climates throughout the year, our SunSeal® glass will help block the heat from sunlight to keep your house cooler.

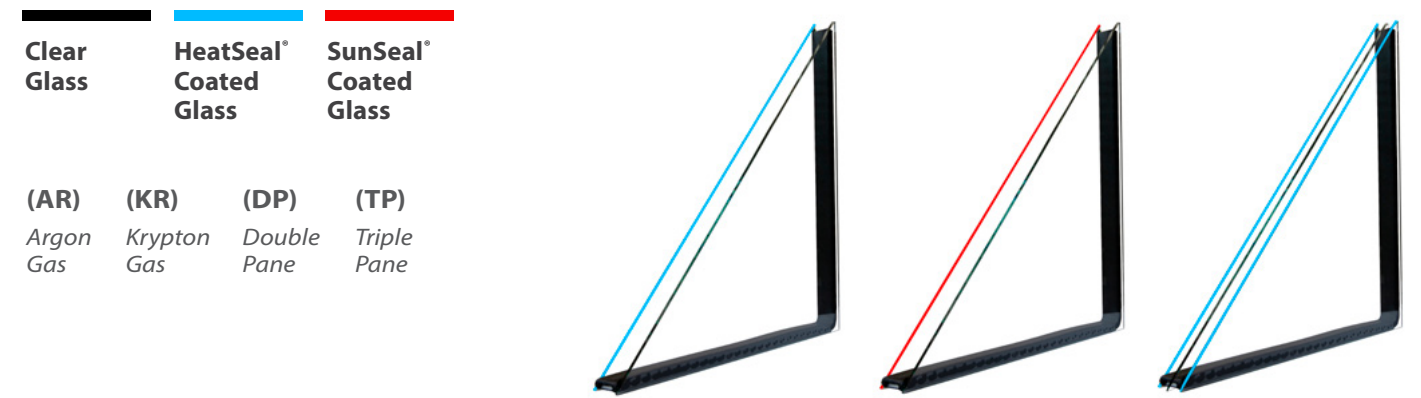


	Clear Glass	HeatSeal® (DP) (AR)	SunSeal® (DP) (AR)	HeatSeal® Triple Glass (TP) (AR)	HeatSeal® Triple Glass (TP) (KR)
U-Factor Measures the rate of heat transfer and tells you how well a window insulates.	✓	✓✓✓	✓✓✓	✓✓✓✓	✓✓✓✓✓
Solar Heat Gain Coefficient How well a window blocks heat from the sun.	✓	✓✓✓	✓✓✓✓✓	✓✓✓✓	✓✓✓✓
Visible Light Transmittance The amount of visible light that comes through a window.	✓✓✓✓✓	✓✓✓✓	✓✓✓	✓✓✓	✓✓✓
UV Protection How well a window protects against ultraviolet rays.	✓	✓✓✓	✓✓✓✓	✓✓✓✓✓	✓✓✓✓✓

HeatSeal® Glass

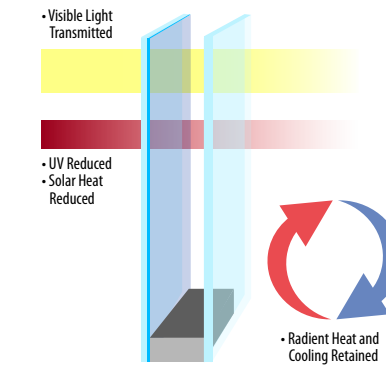


In climates where heating and cooling are the primary concern, HeatSeal® Glass products are designed to take advantage of free solar heat, resulting in higher inside glass temperature. Passive solar and thermal insulation reduce the draft sensation caused by cold glass surfaces, providing windows that reduce heating costs.

HeatSeal® Triple Glass

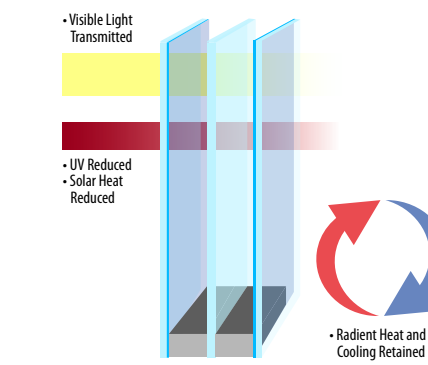

SunSeal® Glass

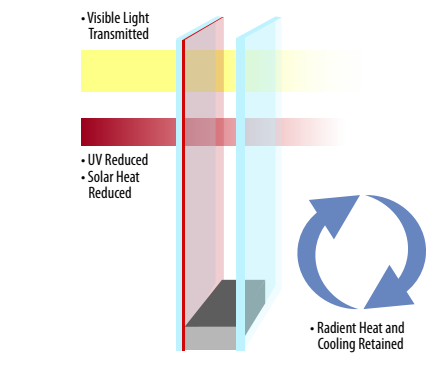


In climates where cooling is your main concern, SunSeal® Glass products are designed to reduce solar heat while still providing color neutrality. This solar control property, combined with thermal insulating benefits, results in beautiful, natural-looking glass that helps keep air conditioning costs low.

When you purchase a window that is advertised as the most energy efficient, you want to be sure the claims are based on facts, certified by a truly independent and objective authority. Their unbiased test results educate purchasers allowing them to make a more educated choice.

Air Infiltration

Air Infiltration/drafts is a term used to describe the air leaking into or out of your home through the window frames. The graph shows the amount of air in cubic feet that may come through the window at speeds of 25mph.

The results are based on a tested window sample by AAMA testing window guidelines. Title of Test & Method: Air Infiltration - ASTM E 283 75 PA - (1.6 psf) 25 mph.

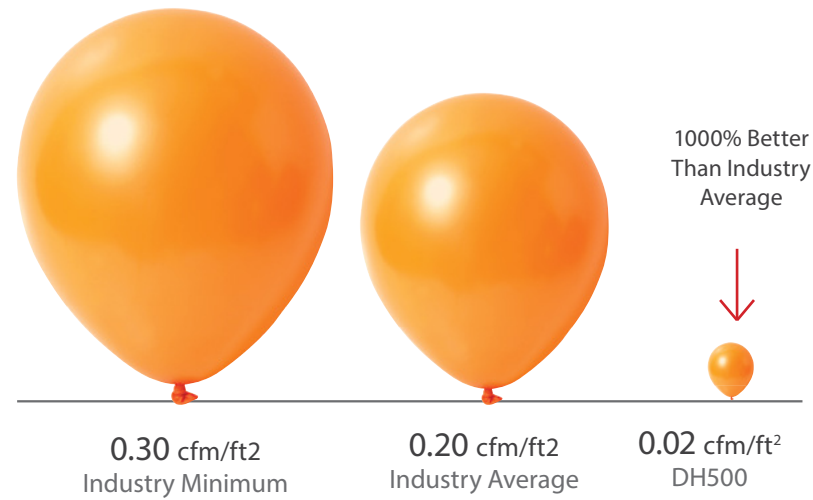

The ENERGY STAR[®] Most Efficient designation is an extension of the ENERGY STAR[®] brand and is designed to recognize and advance the most efficient products among those that qualify for the ENERGY STAR[®]. This recognition is offered for specific categories and awarded for a specific year. The goal of this effort is to encourage new, more energy-efficient products into the market more quickly by targeting early adopters. Each year, EPA will establish criteria for specific product categories to earn Most Efficient recognition. Products that are recognized as ENERGY STAR[®] Most Efficient must already qualify for the ENERGY STAR[®] label.

OKNA Windows proudly displays ENERGY STAR MOST EFFICIENT on our products.




All OKNA windows and doors meet rigorous North American Fenestration Standard (NAFS). Certification is performed by The Keystone Certification Program that is ANSI-accredited to ensure that our products are manufactured as represented by their certifications, which are based on tests performed by accredited laboratories in accordance with the AAMA/WDMA/CSA 101/IS2/A440 – North American Fenestration Standard (NAFS). The NAFS standard defines a rating scale for fenestration product performance, and requires that components used in window & door assemblies also meet stringent component standards. Certification includes annual inspections to ensure the factory quality management system also meets rigid standards - that translates to homeowner peace of mind.

Look for the OKNA Window's Gold Keystone Certification Label



HEATSEAL[®] DELUXE

- Double Pane Glass Unit
- Low-E Glass
- Argon Gas
- Foam Filled Extrusions
- Locking Screen
- Without grids

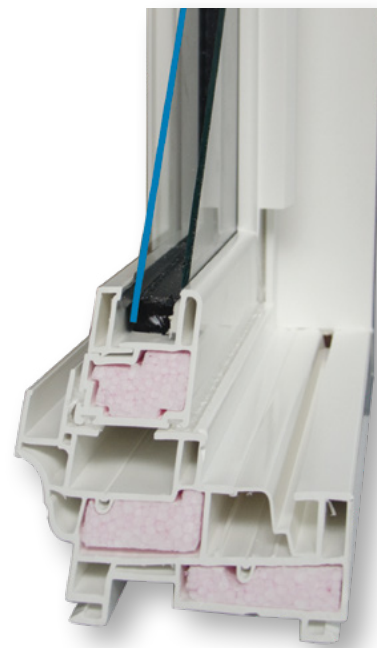

HEATSEAL[®]

- Double Pane Glass Unit
- Low-E Glass
- Argon Gas
- No Foam
- Without grids



HEATSEAL[®] TRIPLE DELUXE XR9


- Triple Pane Glass Unit
- Low-E Glass
- Argon Gas
- Foam Filled Extrusions
- Locking Screen
- Without grids



SUNSEAL[®] DELUXE

SUNSEAL GLASS is specifically designed for homes in the southern climate.

- Double Pane Glass Unit
- High Performance Glass
- Argon Gas
- Foam Filled Extrusions
- Locking Screen
- Without grids

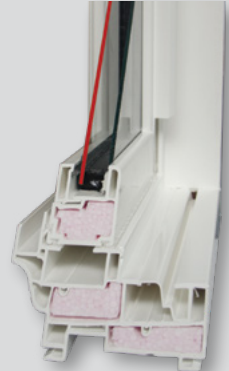

500 SERIES THERMAL PERFORMANCE

Please use the QR code or the text link to access the most up-to-date thermal performance numbers for the 500 series.

Numbers are based off of windows tested without grids.



[DH500 Double Hung](#)



[SL520 Slider](#)



[PW510 Picture Window](#)

500 SERIES STRUCTURAL PERFORMANCE

	Industry Minimum	DH500	Comparison to Industry Minimum	SL520	Comparison to Industry Minimum
NAFS Rating	R15	R50		R40	
Air Infiltration (cfm/ft ²) at speed of 25 mph	0.3	0.02	1000% better	0.09	333% better
Water Penetration (mph) 8" per hour	33	54	64% better	59	79% better
Structural Integrity (mph) Wind Load	94	171	82% better	153	63% better

Numbers are subject to change depending on size of window.

The results are based on a tested window sample by AAMA testing window guidelines. Title of Test & Method: Air Infiltration - ASTM E 283 75 PA - (1.6 psf) 25 mph.

OKNA Windows are backed by the Lifetime Transferable Limited Warranty. Please ask your certified dealer for details on coverage.





OKNA

All illustrations, photographs, and specifications in this publication are based on the latest product information available at the time of printing. Some windows shown with optional features. See actual product for complete accuracy. The manufacturer reserves the right to alter or discontinue any model or specification without notice. Printed colors may not match the product's actual color. Please visit a local dealer to view actual color samples.



OKNA Windows | 400 Crossings Drive, Bristol, PA 19007 | P **215-788-7000** F **215-781-1166** | oknawindows.com

11/2023